

# 4K2K IP BOX CAMERA

YUC-H689



## Feature


- H.264 4K2K (3840 x 2160) 15fps IP Camera for exceptional detail
- Advanced compression technology reduce 20% bandwidth
- Tampering detection & 3 motion area setup
- Remote motion storage to google Drive and Dropbox
- Support SD card continuous recording
- 3 steps IR control
- Day/night profile adjustment
- Mobile view support (push video)
- POE support
- ONVIF compliant
- P2P function option



4K x 2K



Save Until 20% of HDD Space

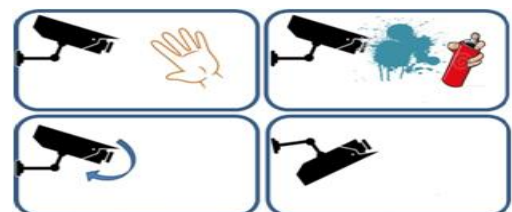

Tampering Detection

# Specification

## YUC-H689

Server	Compression	H.264 / MJPEG
	Resolution	3840x2160@15fps / 3776x2160@15fps / 2592x1944@15fps / 2048x1536@15fps / 1920x1080@15fps, 1280x720@15fps / 640x480@15fps / 640x360@15fps
	Traffic Control	32K ~ 8Mbps
	Max. Frame Rate	3840 x 2160 @15FPS
	Safety	Password protection, IP address filtering, HTTPS encrypted data transmission, 802.1X port-based authentication for network protection, QoS/DSCP
	Protocols	IPv6, IPv4, HTTP, HTTPS, SNMP, QoS/DSCP, Access list, IEEE 802.1X, RTSP, TCP/ IP, UDP, SMTP, FTP, PPPoE, DHCP, DDNS, NTP, UPnP, 3GPP, SAMBA, Bonjour, ICMP
	Number of User	Max. 10 connections
	Storage Capacity	SD card / FTP / NAS(Samba) / E-mail / Google Drive / Dropbox
	Alerting	SMTP / FTP / HTTP / SD
	Pre / Post Alarm	Pre(0,1,2,3,4,5) / Post(0,1,2,3,4,5,10)seconds
	Release for alarm	Motion detection/ I/O / Schedule / Tampering detection
Network Camera	Sensor	1/2.6" Megapixel CMOS sensor
	Optical Lens	CS mount(DC driver)
	D-WDR	Off & 1 ~ 8 level
	AGC	8X ~ 96X
	Shutter Time	Outdoor / Indoor/ 1/30 , 1/50 , 1/60 , 1/100 , 1/125 , 1/250 , 1/500 , 1/1000
	Min Illum	1 Lux(Color) / 0.5 Lux(B/W)
	Day / Night	Light sensor mode / Color mode(Day) / B/W mode(Night) / Times mode / Synchronize with DI input
	Intelligent Video	D-WDR / Tampering Detection / Motion Detection / Privacy Mask /DNR/ IR Intensity
Audio	Audio	2-way
	Audio Compression	G.711(64Kbps) / G.726(24Kbps) / G.726(32Kbps)
	Adjust Volume	Mic-in / audio-out web adjustable
	Audio In	Mic built- in (Support 2-way)
	Audio Out	3.5mm phone jack (Support 2-way)
Terminal	Network Interface	Ethernet (10Base-T/100Base-Tx) / PoE / WiFi (802.11/b/g/n)
	Video Interface	--
	External Port	DI / DO / RS485
	SD Card	SD Card (Recording trigger for schedule, motion detection, IP check, Network wire break down, DI)
General	Operation Voltage	DC 12V Max.: 4.0W(IR on) PoE Max.: 5.3W(IR on)
	Dimen./Weight	65mm(W) x 58mm(H) x 132mm(L)/ 450g
	Operation Temp.	-20°C ~ +45°C

Certificate : CE , FCC , RoHS

\*No SD card slot & local storage function for Argentina

# Design Features

