

# 4MP OUTDOOR IP SPEED DOME CAMERA

## YUC-KX10-R



### Feature

- H.265 4MP 25fps IP IR speedome
- 10X optical zoom with 4X digital zoom
- Digital image stabilization / Digital WDR
- Smart IR, with distance 70 Meter
- Point- to- go for easy PTZ control (patrol groups)
- ROI function x 3 areas & smart stream
- Privacy zone mask x 3 areas
- Support cruise x 8 groups & 256 preset points
- ESD & surge protection design
- -20~60°C wide temperature range
- Built-in Micro SD card for option
- Mobile view support (push video)
- POE support
- ONVIF compliant




Save Until 50% of HDD Space



Point- To- Go




Patrol

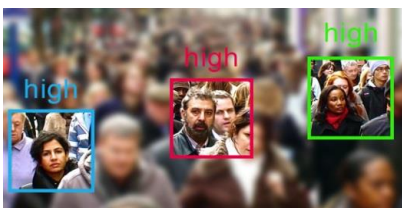

Region of Interest



Privacy Mask

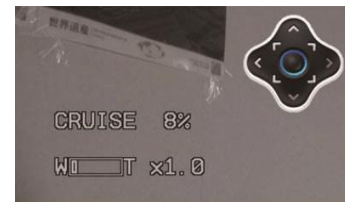

Cruise

# Specification





## YUC-KX10-R

Server	Compression	H.265 / H.264 / M-JPEG
	Resolution	2592x1520@25fps, 2048x1536@30fps, 1920x1080@30fps, 1600x1200@30fps, 1280x960@30fps, 1280x720@30fps, 800x600@30fps, 640x480@30fps, 640x360@30fps, 320x240@30fps
	Traffic Control	32K ~ 8Mbps
	Max. Frame Rate	(25fps) 2592x1520
	Safety	User-ID and password, IP address filtering, HTTP encryption, 802.1X port-based authentication for network protection, QoS/DSCP
	Protocols	IPv6, IPv4, HTTP, HTTPS, SNMP, QoS/DSCP, Access list, IEEE802.1X, RTSP, TCP/IP, UDP, SMTP, FTP, PPPoE, DHCP, DDNS, NTP, UPnP, 3GPP, SAMBA, Bonjour
	Number of User	Max. 10 connections
	Alerting	SMTP / FTP / Samba / Micro SD (optional) / I/O / Google Drive / Dropbox
	Pre / Post Alarm	Pre(0,1,2,3,4,5) / Post(0,1,2,3,4,5,10)seconds
	Release for alarm	Motion detection/ I/O / Schedule
Network Camera	Sensor	1/3" Megapixel CMOS sensor
	Optical Lens	10X optical zoom lens 5-50mm / F1.6 - 1.8
	Shutter Time	Outdoor / Indoor / 1/30, 1/50, 1/60, 1/100, 1/125, 1/250, 1/500, 1/1000, 1/5000, 1/10000
	Min Illum	0.08Lux(Color) / 0.03Lux(B/W)
	IR LED / Range	6pcs / 70M
	Sense up	--
	View Angle	7.0°~51.0° (H) / 4.0°~30.0°(V)
	Pan / Tilt Range	Pan: 360° / Tilt: 0°~90° auto flip
	Manual Control Speed	Pan: 0.45°~90°/s, Tilt: 0.35°~45°/s
	Preset(Patrol) Speed	240°/s
	Preset Accuracy	<±0.15°
	Preset Points	256
	Preset Focus Mode	Auto / Manual
	Patrol	8 groups with 24 point
	Auto Pan	Yes
	Auto Recovery	Pending Time, Action
	Cruise	Yes, 8 groups
Home Position	Yes	
Point To Go	Yes	
Day / Night	Light sensor mode / Color mode(Day) / B/W mode(Night) / Times mode	
Intelligent Video	ROI / DIS / / D-WDR / Motion Detection / Privacy Mask / 3D-De Noise Reduction / Anti-fog / Cruise / Point-To-Go / Diagonal Movement / Present Point (Patrol Group)	
Audio	Audio	N/A
Terminal	Network Interface	Ethernet(10Base-T/100Base-Tx) / PoE
	Video Interface	--
	External Port	DI X 1
	SD Card	Option
General	Operation Voltage	DC 12V Max: 14.5W (IR ON) PoE Max: 15W (IR ON)
	Dimen./Weight	135mm(φ) x198 mm(H) / 1.8Kgs (without bracket)
	Operation Temp.	-20°C ~ +60°C (standard)
	Waterproof	IP66

Certificate : CE , FCC , RoHS

\*No SD card slot & local storage function for Argentina

## Dimension

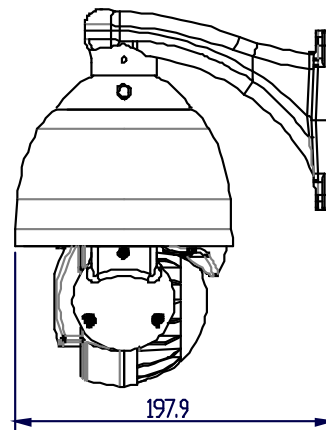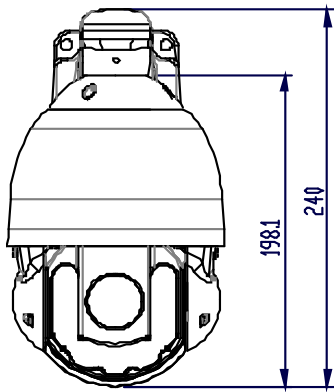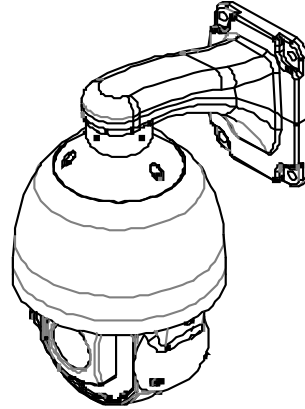

## Accessories



Built-in Wall Mount or Pendant Mount bracket



A-PP04  
Hidden Ceiling Mount (Option)

