


H.265 4K2K IP BULLET CAMERA

YUC-K7B89M

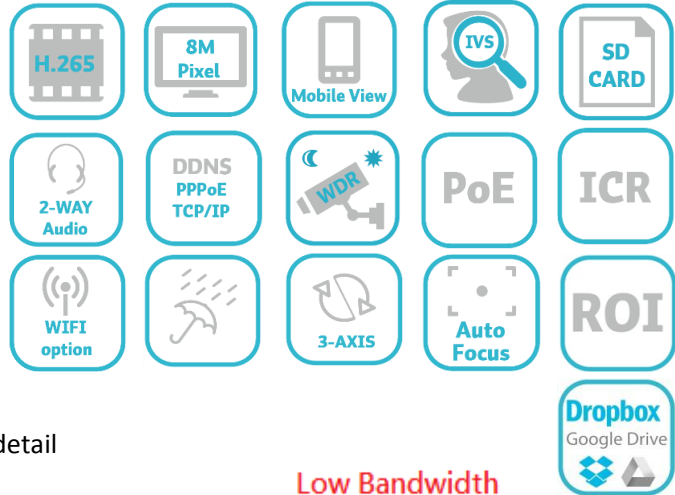

Feature

- 4K2K (3840x2160) 30fps real time for exceptional detail
- H.265 compression saves bandwidth up to 50%
- Quad stream
- Excellent night vision performance with low noise
- Built-in 3.6x motorized zoom lens 3.6~12mm + smart focus system
- ROI (Region of Interest) & smart stream function
- ANR (Automatic Network Replenishment) available
- ESD & surge protection design
- Smart IR with distance up to 40 Meter
- Remote motion storage to Google Drive and Dropbox
- Motion detection (area/sensitivity/motion time adjust and preview)
- Day/night profile adjustment
- Weather proof IP66
- Cold start heater built-in up to -40°C option
- Mobile view support (push video)
- POE support
- ONVIF compliant

Low Bandwidth




Save Until 50% of HDD Space



4K x 2K



3-step IR Intensity

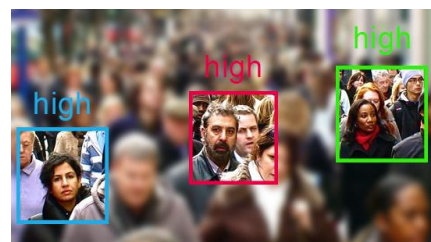

Region of Interest for 3 areas

Specification

YUC-K7B89M

Server	Compression	H.265/ H.264/ MJPEG
	Maximum Stream	4 simultaneous stream
	Resolution	3840x2160@30fps, 3776x2160@30fps, 2592x1944@30fps, 2048x1536@30fps, 1920x1080@30FPS, 1280x720@30FPS, 640x480@30FPS, 640x360@30FPS
	Traffic Control	32K ~ 10Mbps
	Max. Frame Rate	(30fps)3840x2160
	Safety	Password protection, IP address filtering, HTTPS encrypted data transmission, 802.1X port-based, authentication for network protection, QoS/DSCP, ICMP
	Protocols	IPv6, IPv4, HTTP, HTTPS, SNMP, QoS/DSCP, Access list, IEEE 802.1X, RTSP, TCP/ IP, UDP, SMTP, FTP, PPPoE, DHCP, DDNS, NTP, UPnP, 3GPP, SAMBA, Bonjour, ANR
	Number of User	Max. 10 connections
	Alerting	SMTP / FTP / Samba / Micro SD / I/O /Google Drive / Dropbox
	Pre / Post Alarm	Pre(0,1,2,3,4,5) / Post(0,1,2,3,4,5,10)seconds
	Release for alarm	Motion detection / I/O / Schedule / Tampering Detection / Sound Detection
Network Camera	Sensor	1/2.5" Megapixel CMOS sensor
	Optical Lens	Motorized 8MP lens 3.6~12mm / optical 3.6x zoom / F1.4
	View Angle	38~103°(H), 21~55°(V)
	D-WDR	Yes
	AGC	8X ~ 128X
	Shutter Time	Outdoor / Indoor / 1/1/ , 1/30 , 1/50 , 1/60 , 1/100 , 1/125 , 1/250 , 1/500 , 1/1000, 1/5000, 1/10000
	Min Illum	0.01 Lux (Color), 0.005 Lux (B/W)
	IR LED / Range	28pcs + 2pcs High Power / 40M
	Day / Night	Light sensor mode / Color mode(Day) / B/W mode(Night) / Times mode / Synchronize with DI input
	Intelligent Video	ROI / Smart stream / ANR / D-WDR / Tampering Detection / Motion Detection / Privacy Mask / 3D-De Noise Reduction / IR Optimizer / Anti-fog / IR Intensity / Sound Detection / Corridor Mode (90°/270°) / Video Orientation / LENS Distortion Correction
Audio	Audio	2-way
	Audio Compression	G.711(64Kbps) / G.726(24Kbps) / G.726(32Kbps)
	Adjust Volume	Mic-in / Line-out web adjustable
	Audio In	3.5mm phone jack(Support 2-way)
	Audio Out	3.5mm phone jack(Support 2-way)
Terminal	Network Interface	Ethernet (10Base-T/100Base-Tx) / PoE / WiFi (802.11/b/g/n)
	Video Interface	BNC, Video composit (NTSC/PAL)
	External Port	DI / DO
	SD Card	Micro SD Card (Recording trigger for schedule, Motion Detection, IP check, Network wire break down, DI)
General	Operation Voltage	DC 12V Max: 7.5W(IR ON) PoE Max: 8.5W(IR ON)
	Dimen./Weight	77.4mm(φ) x 125.5mm(H) / 720g
	Operation Temp.	-20°C ~ +60°C / -40°C ~ +60°C (Cold Start Heater option)
	Waterproof	IP66

Certificate : CE , FCC , RoHS


*No SD card slot & local storage function for Argentina

Design Features



External SD card slot with cover
(Add rubber for waterproof)

Dimension

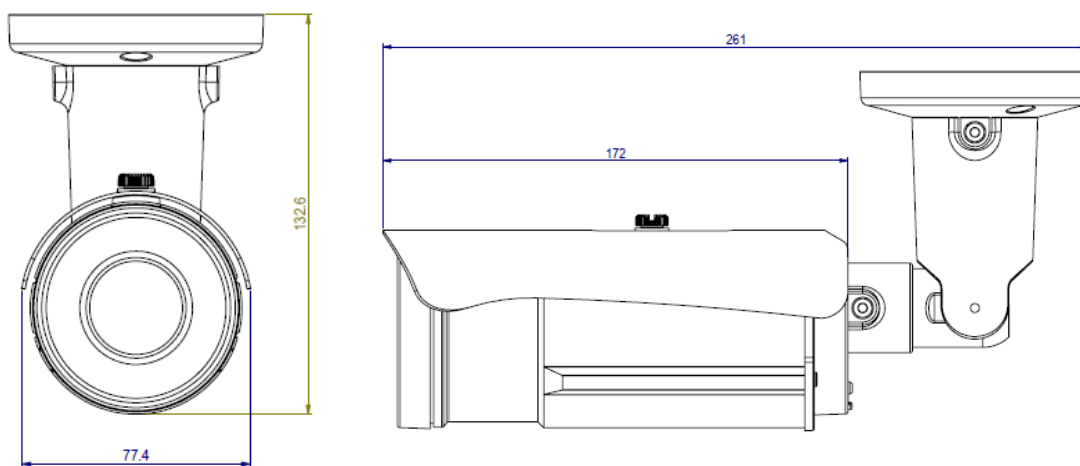

Accessories



YUK-D06
Junction Box (option)